


Face Mount

Cable Runs on a Pitch

Top posts are often corner posts, which may require the stair run to connect to the *inside* of the post. The top and bottom of the cable run would be connected perpendicular to those posts, and only the intermediate posts would be drilled on the angle for the cable to run through.

Use the 500-M Series.

The tensioning device is an Adjust-a-Body® with Threaded Eye, which attaches via mounting screw to the threaded tab. A Push-Lock® with Threaded Eye attaches the same way to the other end.

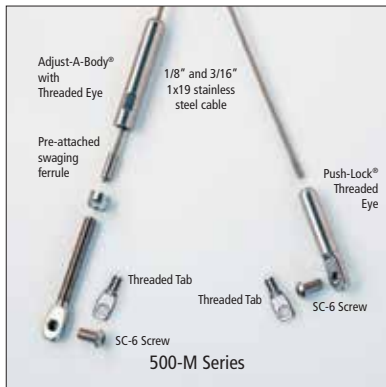

Series 500-M Kits for Metal Posts

Cable Length	1/8" cable	3/16" cable
	any size post	any size post
	PART NO.	PART NO.
5'	50005-M	50005-6M
10'	50010-M	50010-6M
15'	50015-M	50015-6M
20'	50020-M	50020-6M
25'	50025-M	50025-6M
30'	50030-M	50030-6M
40'	50040-M	50040-6M
50'	50050-M	50050-6M

Tools needed for 500-M Series on stairs:

- 5/32 drill bit if 1/8" cable, 7/32 if 3/16"
- Cutting tap drill bit I (for pilot hole) and 5/16-24 tap for threaded tab installation
- 7/16 wrench for tensioning Adjust-a-Body®
- 5/32 hex wrench to tighten mounting screws
- Cable cutting tool

