

# Face Mount to Through-the-Post Mount

## Straight Cable Runs up to 25 feet

Deck 1 has dedicated end posts, but the posts next to the house are too close to access the back side of the posts. Run #1 is through the post, so it will take a Series 212 or 232 kit. However, for Runs #2 and #3, you will attach to the *face* of the posts next to the house and run *through* the post at the other end.

Deck 2 has shared corner posts, but the posts next to the house are placed such that the back side of the posts are accessible, so for Runs #2 and #3, you will attach to the *face* of the corner posts and run *through* the post next to the house.

**For 1-1/2" metal square tube, use the 702 Series.**



**For 2" square tube, use the 703 Series.**

The tensioning device is a 1½" (or 2") long Invisiware® Receiver, which installs through the metal post on one end. A Push-Lock® Threaded Bolt is threaded into the other end.



Series 702 and 703 Kits

Cable Length	1/8" cable		3/16" cable	
	1½" metal post	2" metal post	1½" metal post	2" metal post
	PART NO.	PART NO.	PART NO.	PART NO.
5'	70205	70305	70205-6	70305-6
10'	70210	70310	70210-6	70310-6
15'	70215	70315	70215-6	70315-6
20'	70220	70320	70220-6	70320-6
25'	70225	70325	70225-6	70325-6

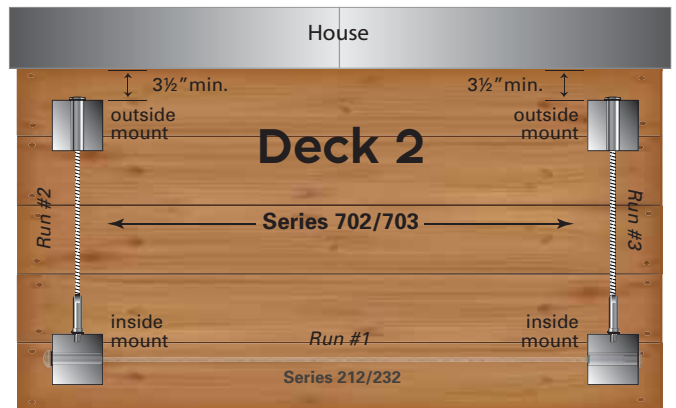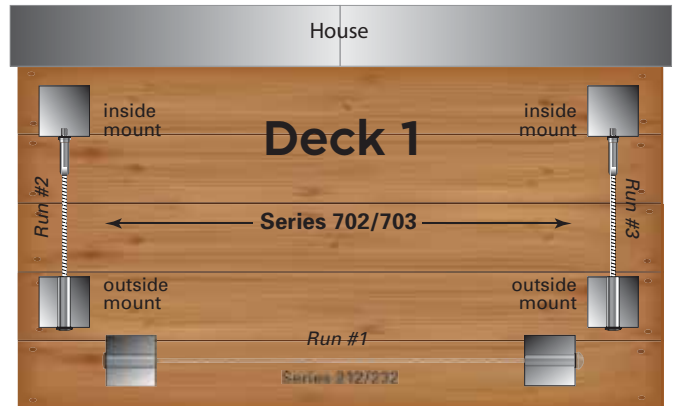

### Tools needed for 702 and 703 Series:

- 5/32 drill bit if 1/8" cable, 7/32 if 3/16" cable
- 29/64 drill bit for Receiver installation
- 3/16 hex wrench for tensioning Receiver
- Cutting tap drill bit I (for pilot hole) and 5/16-24 tap for Push-Lock® Threaded Bolt installation
- 3/8 wrench for tightening Push-Lock® Threaded Bolt
- Cable cutting tool